


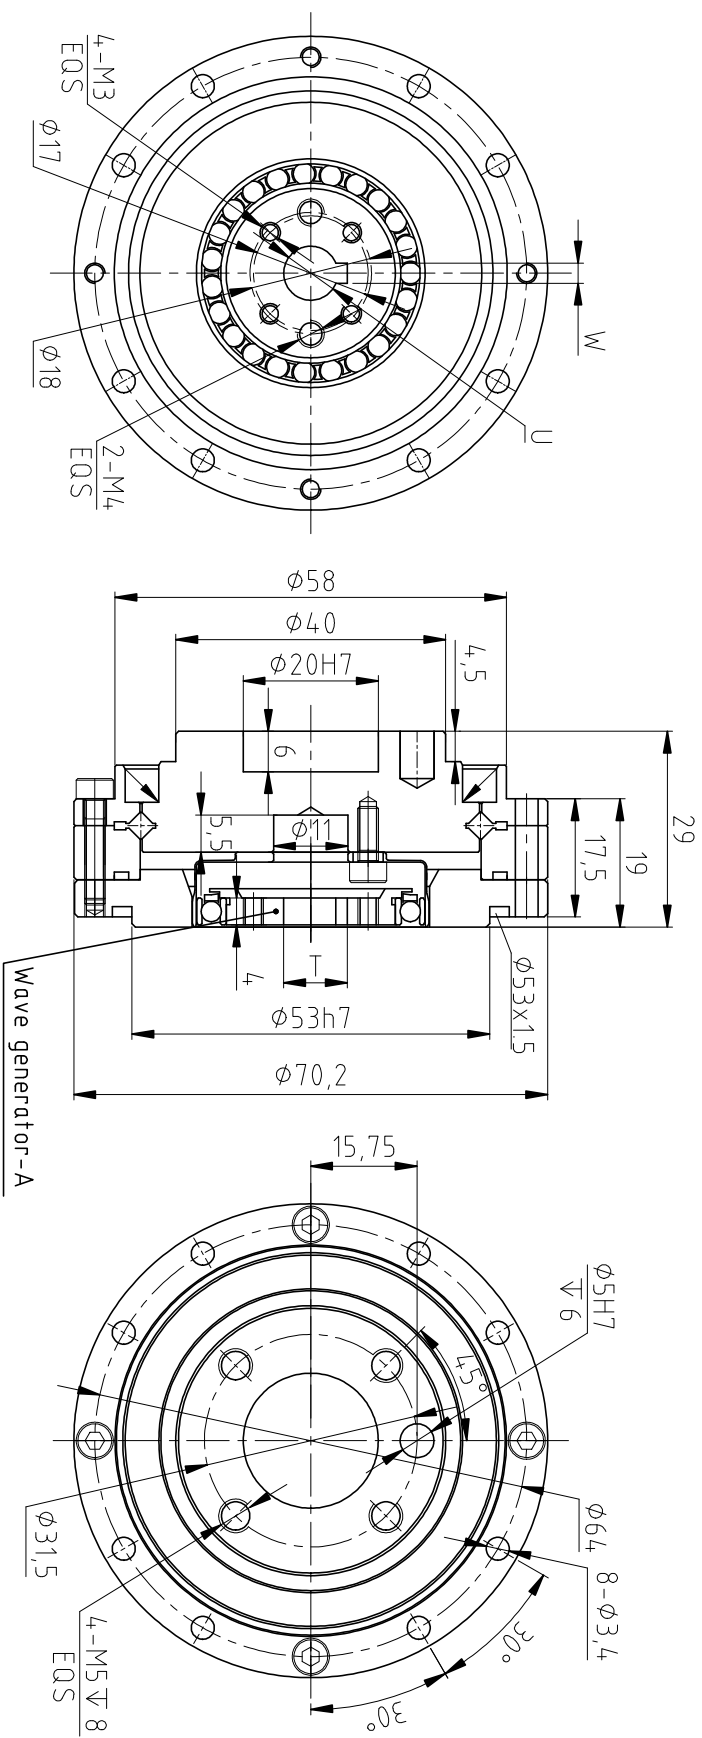

- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

FSD-14-P-XX-U-I																							
MODEL	U	T	W	Model		Rated torque at2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash		Weight		Design life	
Wave generator-A φ6	φ6H7	7 ⁰ ₀	2JS9/P9	14	Reduction ratio	Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min	r/min	Arc Sec	kg	Hour					
Wave generator-A φ8	φ8H7	9.4 ⁰ ₀	3JS9/P9			50	3.7	0.38	12	1.2	4.8	0.49	24	2.4	8500	3500	≤20	≥9000					
Wave generator-A φ11	φ11H7	/	/			80	5.4	0.55	16	1.6	7.7	0.79	35	3.6	8500	3500	≤20	FSD-I:0.37	≥10000				
						100	5.4	0.55	19	1.9	7.7	0.79	35	3.6	8500	3500	≤20	≥10000					

5211111111

Laifual